


279.00 EUR

incl. 19% VAT, plus [shipping](#)

- Intel 8th/9th Gen. !
- H310 Chipset !
- SBC !

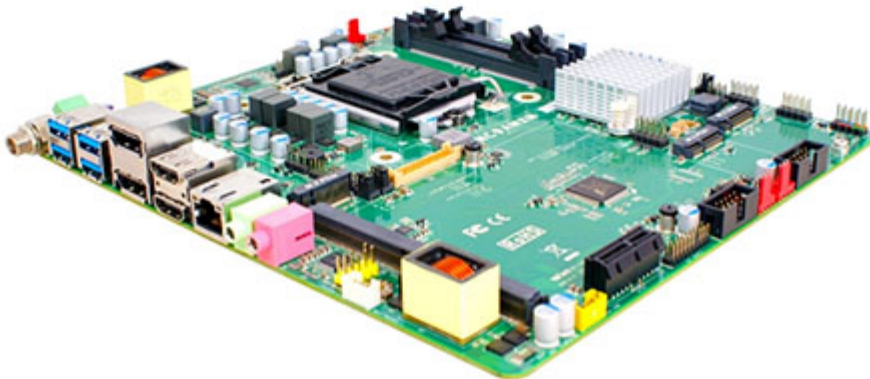

- Intel® LGA1151 Socket Core I3,I5,I7 Pentium Processor
- Intel® Coffee Lake-S H310 Chip
- Support Dual Channel DDR4 2133MHz SO-DIMM up to 32GB
- Support 1\* MXM VGA Card Socket (MXM:90W)
- 1\* SATA III (6Gb/s) & M.2 (M key 2280, NVMe), 1\* PCI-E x1, 1\* M.2 E key Support CNVi, 1\* M.2 B key Support 3G/4G Module
- 1\* Intel® I219LM GbE, 2\* RS232 (COM2 Support 5V/12V TTL), 4\* External USB3.1, 4\* Internal USB2.0
- 12 ~ 36V DC-in
- Form Factor: 220\*200mm

MXM module not included in scope of supply !

<b>Form Factor</b>	
Dimensions	– SBC (220 * 220mm)
<b>Processor System</b>	
CPU	– Intel® LGA1151 Coffee Lake Series Processor (Max 90W)
Core Number	– (by CPU)
Max Speed	– (by CPU)
L2 Cache	– (by CPU)
Chipset	– H310 /Q370
BIOS	– AMI 128M Flash ROM
<b>Expansion Slot</b>	
Expansion	<ul style="list-style-type: none"> <li>– 1* M.2 M Key (2280, for NVMe)</li> <li>– 1* M.2 E Key (2230, support CNVi)</li> <li>– 1* M.2 B Key (3042, support 3G/4G Module)</li> <li>– 1* SATA</li> <li>– 1* PCIe x1 slot</li> <li>– 1* MXM Card Socket (Max: 90W)</li> <li>– 1* SIM Card holder</li> </ul>
<b>Memory</b>	
Technology	– Dual CH DDR4 2400MHz DRAM
Max.	– 32GB
Socket	– 2 * SO-DIMM
<b>Graphics 1</b>	
Controller	– Intel® HD Graphics
VRAM	– Shared Memory
eDP 1.2	– 1 (Max Resolution : 4096x2304 @60Hz, by CPU)
DisplayPort	– 1 (Max Resolution : 4096x2304 @60Hz, by CPU)
HDMI	– 1 (Max Resolution : 4096x2160 @30Hz, by CPU)
<b>Graphics 2</b>	
Controller	– by MXM VGA Cards
DisplayPort	– 1* DP, by MXM VGA Card
HDMI	– 3* HDMI, by MXM VGA Card
Multi Display	– 6
<b>Ethernet</b>	
Ethernet	– 10/100/1000 Mbps
Controller	– Intel® I219LM GbE
Connector	– 1 * RJ 45
<b>Audio</b>	
CODEC	– HD Audio : Realtek ALC662VD
Channel	– Line-Out, MIC
<b>SATA</b>	
Max Data Transfer Rate	– 1* SATAIII (6.0Gb/s)
<b>Rear I/O</b>	

Rear I/O	<ul style="list-style-type: none"> <li>- 2* HDMI</li> <li>- 2* DP</li> <li>- 1* RJ45</li> <li>- 4* USB3.1</li> <li>- Line-Out, MIC</li> <li>- 9~36 V DC-in</li> </ul>
<b>Internal Connector</b>	
Internal Connector	<ul style="list-style-type: none"> <li>- 4* USB 2.0</li> <li>- 1* eDP</li> <li>- 3* HDMI</li> <li>- 2* COM (COM2 support 5V/12V TTL)</li> <li>- 1* SATAIII (6.0Gb/s)</li> <li>- 3* M.2 (M key, E key, B key)</li> <li>- 1* 8bit GPIO</li> <li>- 1* Chassis intrusion</li> <li>- 1* Audio Header</li> <li>- 1* 3W AMP Speaker</li> <li>- 1* SMBUS/ I2C</li> <li>- 1* AT mode</li> </ul>
<b>Watchdog Timer</b>	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments (10sec ~ 255min)
<b>Power Requirements</b>	
Input PWR	- 12~36V DC-in
Power On	AT/ATX Supported <ul style="list-style-type: none"> <li>- AT : Directly PWR on as Power input ready</li> <li>- ATX: Press Button to PWR on after Power input ready</li> </ul>
<b>Certifications</b>	
Certifications	- CE, FCC, RoHS, REACH
<b>Environment</b>	
Temperature	- Operating: 0°C ~ 60°C
	- Storage: -20°C ~ 85°C